

REPORT NUMBER: ITL85715

ISSUE DATE: 10/02/15

PAGE: 1 OF 9

REVISED: 06/21/16

PREPARED FOR: LED ROADWAY LIGHTING LTD.

CATALOG NUMBER: NXT 36S 0 X 2LB 7 XX 4 XX X XX X

LUMINAIRE: CAST METAL HOUSING WITH GRAY PAINTED INTERIOR FINISH, 1 WHITE CIRCUIT BOARD WITH 36 LEDS, 1 CLEAR PLASTIC LENS WITH 1 OPTIC PER LED, CLEAR FLAT GLASS LENS IN CAST GRAY PAINTED METAL DOOR FRAME.

LAMPS: THIRTY-SIX WHITE LIGHT EMITTING DIODES (LEDs), VERTICAL BASE-UP POSITION.

INPUT ELECTRICAL: 120.0 VOLTS, 80.0 WATTS, 0.675 AMPS

LED DRIVER: LED ROADWAY LIGHTING J100UN, DRIVER HAS MULTIPLE LEADS, ONLY LINE INPUT AND LED OUTPUT LEADS CONNECTED FOR THIS TEST, OUTPUT CURRENT ROTARY SWITCH SET TO 700mA. LRL65633-LF SURGE PROTECTOR.

NOTE: DATA SHOWN IS ABSOLUTE FOR THE SAMPLE PROVIDED AT RATED INPUT VOLTAGE (120VAC, 60Hz) TO THE DRIVER AND SURGE PROTECTOR. SURGE PROTECTOR INFORMATION PROVIDED BY CLIENT.

TEST PROCEDURE: IESNA LM-79-08

TEST DISTANCE = 20.0 FEET

TOTAL LUMEN OUTPUT: 8555

COLOR TEMPERATURE AS MEASURED IN INTEGRATING SPHERE TEST # ITL85718: 3152K

COLOR RENDERING INDEX AS MEASURED IN INTEGRATING SPHERE TEST # ITL85718: 72

LED DC DRIVE CURRENT (mA): 700 (PROVIDED BY CLIENT)


POWER FACTOR: 98.8 %

BUG RATING: B2 U0 G2

LUMINAIRE EFFICACY: 106.9 lm/W

IES CLASSIFICATION: Short, Type II

**CUTOFF DESIGNATION IS NOT INTENDED TO BE USED WITH ABSOLUTE PHOTOMETRIC TESTS.

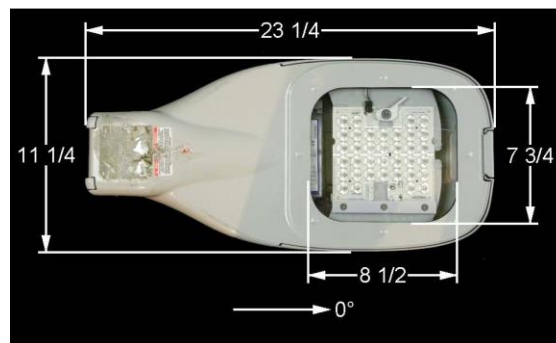


FLUX DISTRIBUTION

LUMENS	DOWNWARD	UPWARD	TOTALS
HOUSE SIDE	2010	0	2010
STREET SIDE	6545	0	6545
TOTALS	8555	0	8555

TESTING WAS PERFORMED IN ACCORDANCE WITH IESNA LM-79-08
TEST ANGULAR INCREMENTS AND REPORT FORMATTING WAS BASED ON IESNA LM-31-95

THIS REPORT IS BASED ON PUBLISHED INDUSTRY PROCEDURES. FIELD PERFORMANCE MAY DIFFER FROM LABORATORY PERFORMANCE.



itl boulder
THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

PHONE: (303) 442-1255

FAX: (970) 535-3114

E-MAIL: itl@itlboulder.com

WEBSITE: www.itlboulder.com


NVLAP
NVLAP LAB CODE: 200925-0

INDEPENDENT TESTING LABORATORIES, INC.

4066 CAMELOT CIRCLE, LONGMONT, CO 80504 USA

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINATION

Values based on 30 foot mounting height.

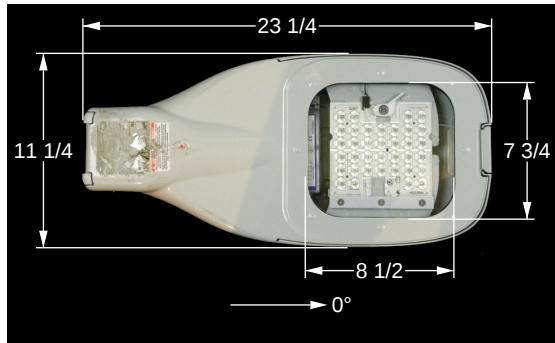

REPORT NUMBER: ITL85715

ISSUE DATE: 10/02/15

PAGE: 2 OF 9

REVISED: 06/21/16

PREPARED FOR: LED ROADWAY LIGHTING LTD.

CATALOG NUMBER: NXT 36S 0 X 2LB 7 XX 4

XX X XX X

LUMINAIRE: CAST METAL HOUSING WITH GRAY PAINTED INTERIOR FINISH, 1 WHITE CIRCUIT BOARD WITH 36 LEDS, 1 CLEAR PLASTIC LENS WITH 1 OPTIC PER LED, CLEAR FLAT GLASS LENS IN CAST GRAY PAINTED METAL DOOR FRAME.

LAMPS: THIRTY-SIX WHITE LIGHT EMITTING DIODES (LEDs), VERTICAL BASE-UP POSITION.

INPUT ELECTRICAL: 120.0 VOLTS, 80.0 WATTS, 0.675 AMPS

LED DRIVER: LED ROADWAY LIGHTING J100UN, DRIVER HAS MULTIPLE LEADS, ONLY LINE INPUT AND LED OUTPUT LEADS CONNECTED FOR THIS TEST, OUTPUT CURRENT ROTARY SWITCH SET TO 700mA. LRL65633-LF SURGE PROTECTOR.

NOTE: DATA SHOWN IS ABSOLUTE FOR THE SAMPLE PROVIDED AT RATED INPUT VOLTAGE (120VAC, 60Hz) TO THE DRIVER AND SURGE PROTECTOR. SURGE PROTECTOR INFORMATION PROVIDED BY CLIENT.

TEST PROCEDURE: IESNA LM-79-08

TEST DISTANCE = 20.0 FEET


IES Classification: Short, Type II


--- 1/2 Maximum Candela trace

X Maximum Candela point

Checked *B. HYRE*

Approved *R. BEATTIE*
Lighting Engineer

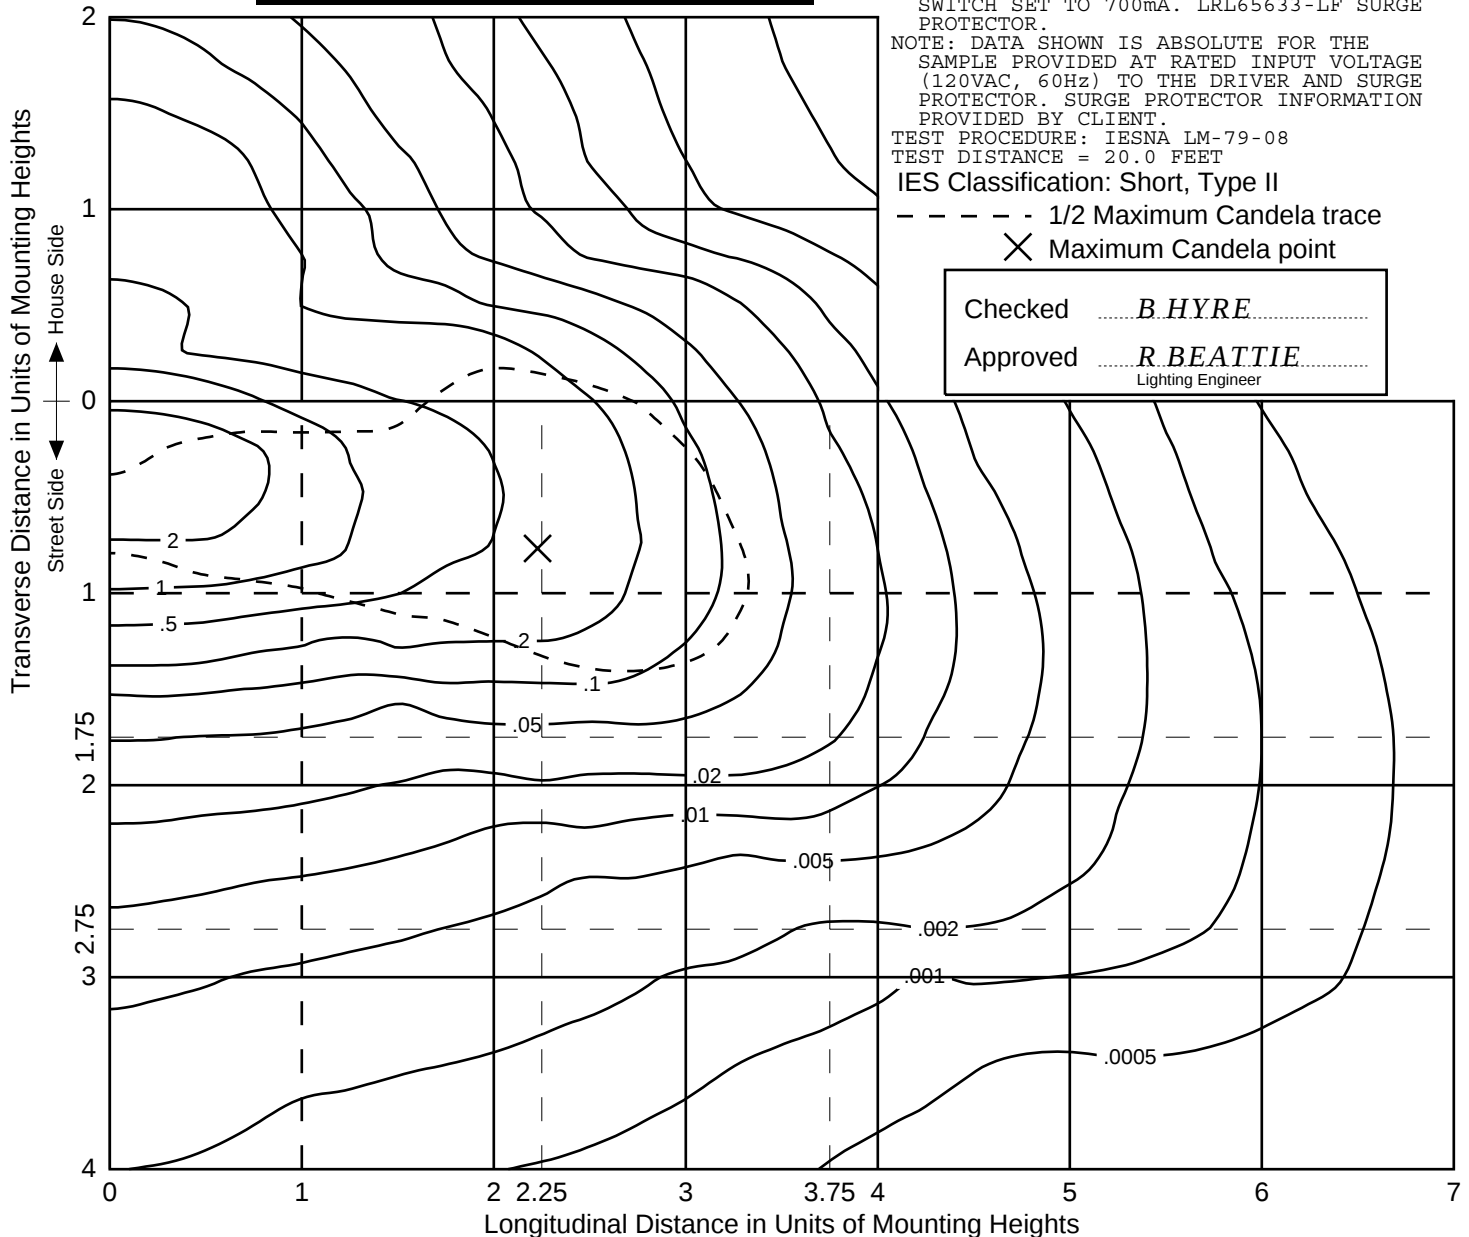



itl boulder
THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

NVLAP
NVLAP LAB CODE: 200925-0

INDEPENDENT TESTING LABORATORIES, INC.
4066 CAMELOT CIRCLE, LONGMONT, CO 80504 USA

PHONE: (303) 442-1255 • FAX: (970) 535-3114 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL85715
ISSUE DATE: 10/02/15 PAGE: 3 OF 9
REVISED: 06/21/16
PREPARED FOR: LED ROADWAY LIGHTING LTD.
CATALOG NUMBER: NXT 36S 0 X 2LB 7 XX 4
XX X XX X

LUMINAIRE: CAST METAL HOUSING WITH GRAY
PAINTED INTERIOR FINISH, 1 WHITE
CIRCUIT BOARD WITH 36 LEDS, 1 CLEAR
PLASTIC LENS WITH 1 OPTIC PER LED,
CLEAR FLAT GLASS LENS IN CAST GRAY
PAINTED METAL DOOR FRAME.

LAMPS: THIRTY-SIX WHITE LIGHT EMITTING
DIODES (LEDS), VERTICAL BASE-UP
POSITION.

INPUT ELECTRICAL: 120.0 VOLTS, 80.0
WATTS, 0.675 AMPS


LED DRIVER: LED ROADWAY LIGHTING J100UN,
DRIVER HAS MULTIPLE LEADS, ONLY LINE
INPUT AND LED OUTPUT LEADS CONNECTED
FOR THIS TEST, OUTPUT CURRENT ROTARY
SWITCH SET TO 700mA. LRL65633-LF SURGE
PROTECTOR.

NOTE: DATA SHOWN IS ABSOLUTE FOR THE
SAMPLE PROVIDED AT RATED INPUT VOLTAGE
(120VAC, 60Hz) TO THE DRIVER AND SURGE
PROTECTOR. SURGE PROTECTOR INFORMATION
PROVIDED BY CLIENT.

TEST PROCEDURE: IESNA LM-79-08

TEST DISTANCE = 20.0 FEET

MAXIMUM PLANE AND MAXIMUM CONE PLOTS OF CANDELA

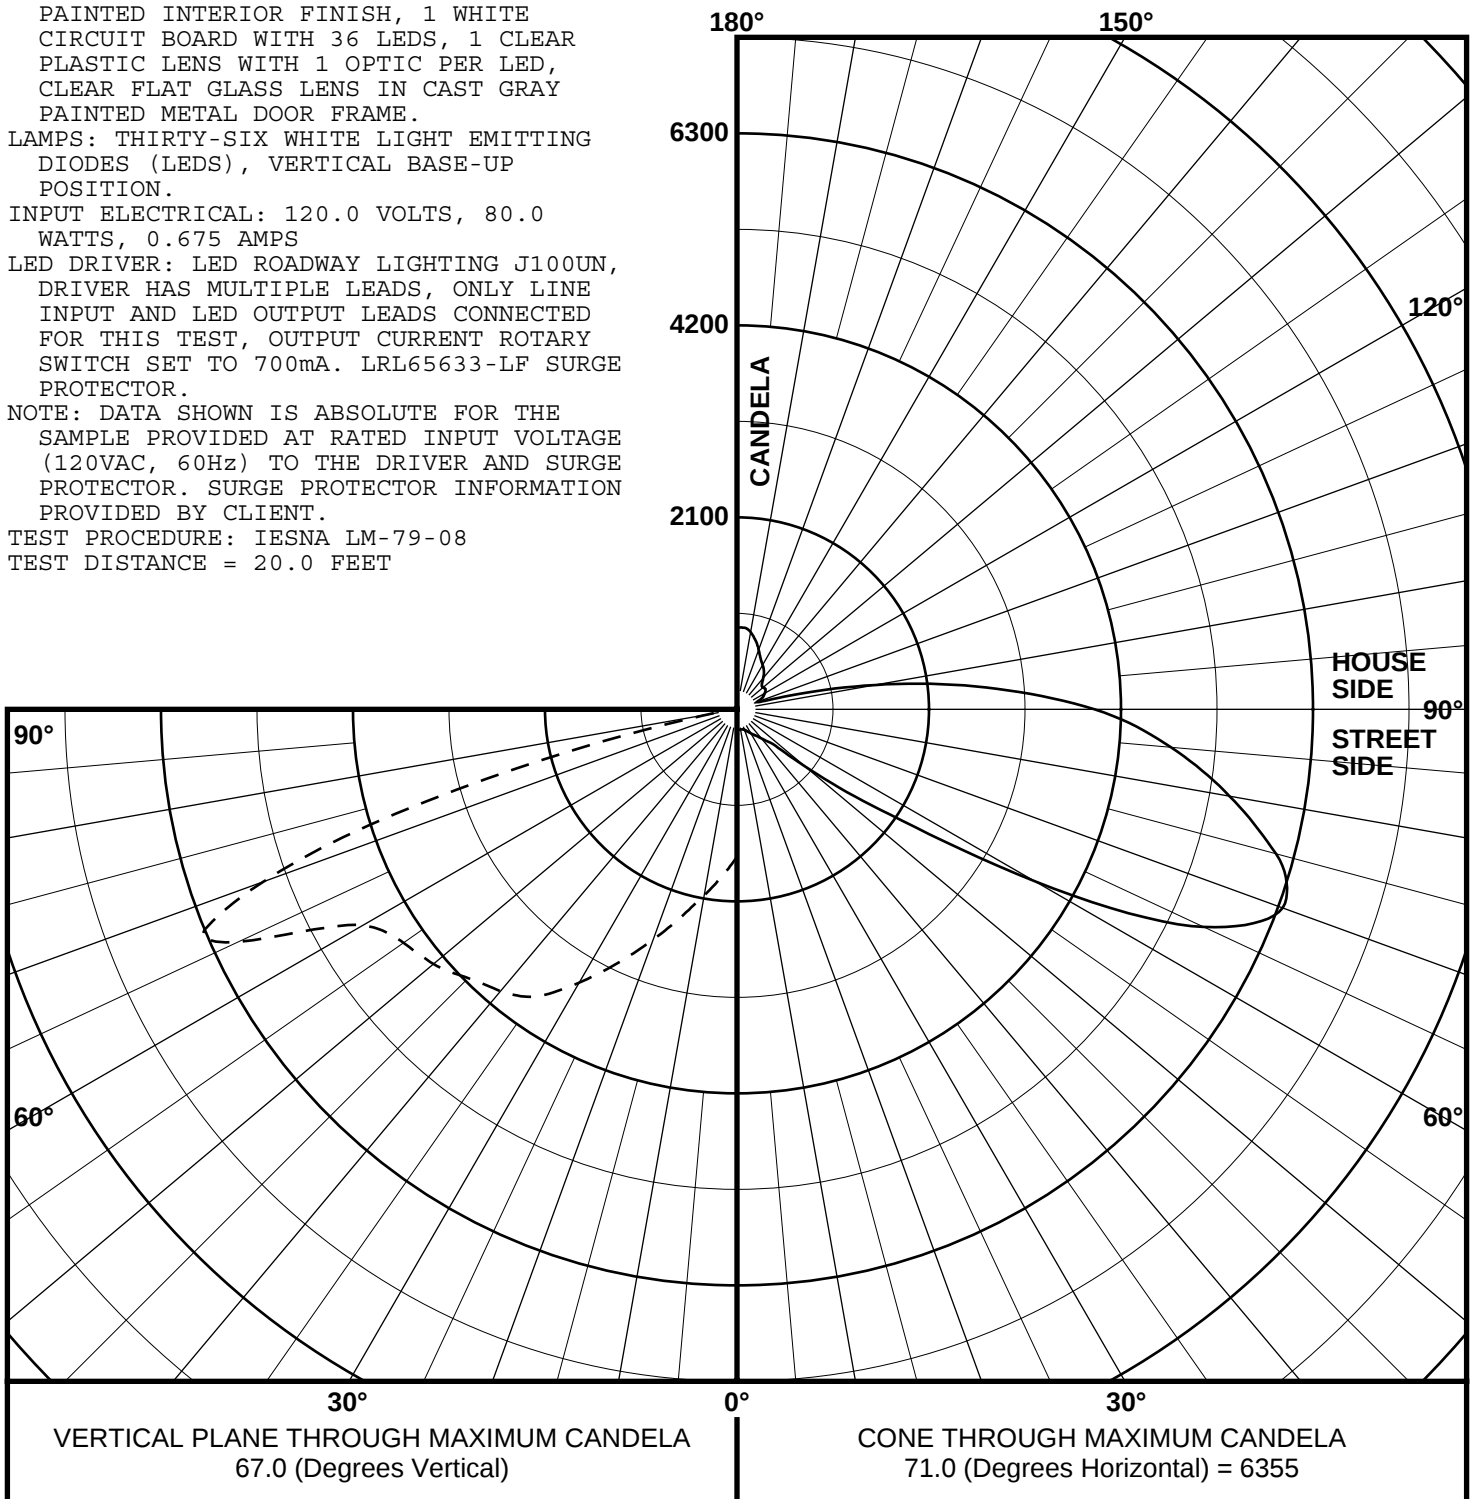



itl boulder
THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

PHONE: (303) 442-1255 • FAX: (970) 535-3114 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com




INDEPENDENT TESTING LABORATORIES, INC.
4066 CAMELOT CIRCLE, LONGMONT, CO 80504 USA

REPORT NUMBER: ITL85715
ISSUE DATE: 10/02/15
PREPARED FOR: LED ROADWAY LIGHTING LTD.

PAGE: 4 OF 9
REVISED: 06/21/16


COEFFICIENTS OF UTILIZATION AND FLUX DISTRIBUTION

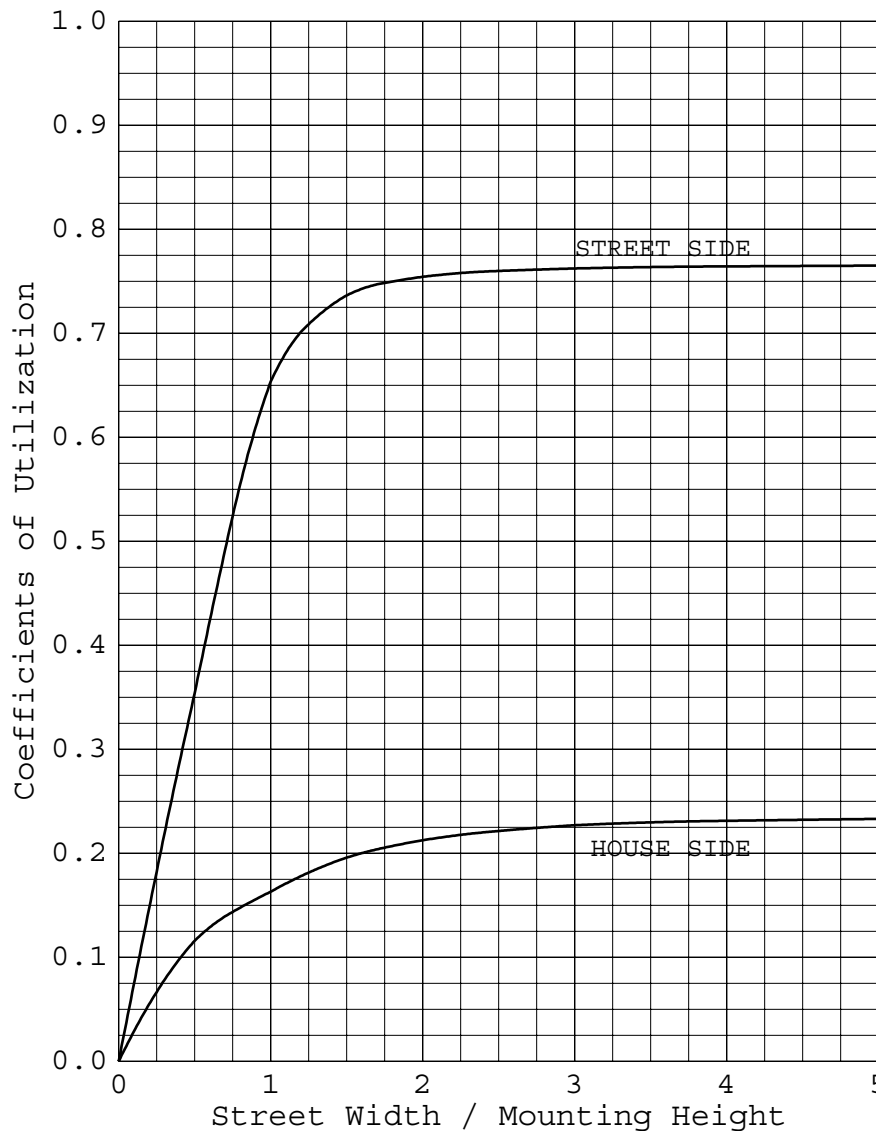

	LUMENS	PERCENT OF FIXTURE
DOWNWARD STREET SIDE	6545	76.5
DOWNWARD HOUSE SIDE	2010	23.5
DOWNWARD TOTAL	8555	100.0
UPWARD STREET SIDE	0	0.0
UPWARD HOUSE SIDE	0	0.0
UPWARD TOTAL	0	0.0
TOTAL FLUX	8555	100.0

EFFICACY = 106.9 lm/W

ALL CANDELA AND LUMENS IN THIS REPORT ARE BASED ON ABSOLUTE PHOTOMETRY.
THE COEFFICIENT OF UTILIZATION VALUES ARE BASED ON THE TOTAL ABSOLUTE
LUMEN OUTPUT OF THIS LUMINAIRE SAMPLE.



itl boulder
THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

PHONE: (303) 442-1255

FAX: (970) 535-3114

E-MAIL: itl@itlboulder.com

WEBSITE: www.itlboulder.com



INDEPENDENT TESTING LABORATORIES, INC.
4066 CAMELOT CIRCLE, LONGMONT, CO 80504 USA

REPORT NUMBER: ITL85715

ISSUE DATE: 10/02/15

PREPARED FOR: LED ROADWAY LIGHTING LTD.

PAGE: 5 OF 9

REVISED: 06/21/16


FLUX DISTRIBUTION BY SOLID ANGLE

(PER IESNA TM-15-11, LUMINAIRE CLASSIFICATION
SYSTEM FOR OUTDOOR LUMINAIRES)

	LUMENS	PERCENT OF FIXTURE	BUG ZONE RATINGS
FORWARD LIGHT	6545.	76.5	
FL (0- 30)	1224.3	14.3	
FM (30- 60)	3746.3	43.8	
FH (60- 80)	1555.6	18.2	G1
FVH(80- 90)	19.1	0.2	G1
BACK LIGHT	2010.	23.5	
BL (0- 30)	366.2	4.3	B1
BM (30- 60)	1012.8	11.8	B2
BH (60- 80)	619.2	7.2	B2 G2
BVH(80- 90)	11.7	0.1	G1
UPLIGHT	0.	0.0	
UL (90-100)	0.0	0.0	U0
UH (100-180)	0.0	0.0	U0
TRAPPED LIGHT	0.	0.0	
TOTAL FLUX	8555.	100.0	

BACKLIGHT, UPLIGHT, AND GLARE (BUG) RATINGS
(PER ADDENDUM A FOR IESNA TM-15-11)

BUG RATING: B2 U0 G2



itl boulder
THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

NVLAP
NVLAP LAB CODE: 200925-0

INDEPENDENT TESTING LABORATORIES, INC.
4066 CAMELOT CIRCLE, LONGMONT, CO 80504 USA

PHONE: (303) 442-1255 • FAX: (970) 535-3114 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL85715
ISSUE DATE: 10/02/15
PREPARED FOR: LED ROADWAY LIGHTING LTD.

PAGE: 6 OF 9
REVISED: 06/21/16

CANDELA TABULATION

	STREET SIDE										
	0.0	5.0	15.0	25.0	35.0	45.0	55.0	65.0	71.0	75.0	85.0
	180.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	175.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	165.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	155.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	145.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	135.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	125.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	115.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	105.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	95.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	92.5	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	90.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	87.5	4.	4.	4.	4.	4.	3.	4.	4.	5.	4.
	85.0	14.	14.	13.	14.	16.	16.	17.	29.	27.	24.
V	82.5	31.	30.	30.	32.	37.	39.	47.	120.	113.	99.
E	80.0	51.	50.	51.	56.	66.	70.	95.	345.	321.	289.
R	77.5	94.	90.	77.	84.	102.	116.	193.	952.	1010.	921.
T	75.0	151.	140.	106.	117.	141.	181.	391.	2151.	2500.	2303.
I	72.5	160.	152.	138.	154.	195.	260.	778.	3542.	4230.	4151.
C	70.0	191.	183.	180.	203.	256.	360.	1299.	4928.	5517.	5398.
A	67.5	215.	216.	216.	254.	331.	488.	1787.	5692.	6305.	5997.
L	67.0<<	224.	225.	225.	266.	348.	515.	1916.	5634.	6355.	6102.
	65.0	256.	256.	261.	324.	423.	644.	2558.	5295.	6021.	6084.
A	62.5	308.	309.	326.	430.	554.	905.	3396.	5105.	5212.	5142.
N	60.0	389.	394.	430.	563.	753.	1337.	4113.	5073.	4722.	4427.
G	57.5	479.	489.	563.	756.	1015.	1989.	4683.	5024.	4545.	4190.
L	55.0	649.	673.	785.	1033.	1347.	2887.	4933.	4928.	4452.	4122.
E	52.5	916.	950.	1079.	1367.	1933.	3778.	5041.	4781.	4392.	4101.
	50.0	1289.	1296.	1447.	1908.	2888.	4291.	5025.	4645.	4333.	4064.
	47.5	1849.	1860.	2057.	2582.	3675.	4600.	4908.	4545.	4251.	3994.
	45.0	2344.	2352.	2555.	3218.	4104.	4697.	4787.	4449.	4157.	3900.
	42.5	2733.	2791.	3056.	3631.	4258.	4690.	4694.	4362.	4083.	3817.
	40.0	3145.	3171.	3349.	3752.	4315.	4643.	4579.	4275.	4023.	3759.
	37.5	3300.	3312.	3472.	3845.	4309.	4541.	4437.	4173.	3946.	3688.
	35.0	3455.	3460.	3587.	3877.	4233.	4397.	4264.	4037.	3833.	3580.
	30.0	3556.	3557.	3615.	3761.	3945.	3975.	3863.	3663.	3452.	3214.
	25.0	3414.	3409.	3426.	3483.	3542.	3543.	3468.	3262.	3055.	2842.
	20.0	3151.	3146.	3141.	3164.	3180.	3167.	3071.	2859.	2681.	2513.
	15.0	2905.	2899.	2883.	2878.	2847.	2780.	2682.	2491.	2349.	2223.
	10.0	2598.	2594.	2573.	2540.	2496.	2416.	2314.	2167.	2067.	1983.
	5.0	2189.	2175.	2162.	2137.	2094.	2040.	1970.	1881.	1829.	1787.
	0.0	1613.	1613.	1613.	1613.	1613.	1613.	1613.	1613.	1613.	1613.
									PLANE OF MAXIMUM CANDELA		
									CONE OF MAXIMUM CANDELA		



itl boulder
THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

NVLAP
NVLAP LAB CODE: 200925-0

INDEPENDENT TESTING LABORATORIES, INC.
4066 CAMELOT CIRCLE, LONGMONT, CO 80504 USA

PHONE: (303) 442-1255 • FAX: (970) 535-3114 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL85715
ISSUE DATE: 10/02/15
PREPARED FOR: LED ROADWAY LIGHTING LTD.

PAGE: 7 OF 9
REVISED: 06/21/16

CANDELA TABULATION

	HOUSE SIDE		LATERAL ANGLE								
	90.0	95.0	105.0	115.0	125.0	135.0	145.0	155.0	165.0	175.0	180.0
	180.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	175.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	165.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	155.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	145.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	135.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	125.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	115.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	105.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	95.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	92.5	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	90.0	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
	87.5	4.	4.	3.	2.	1.	0.	0.	0.	0.	0.
	85.0	14.	12.	11.	10.	10.	11.	11.	5.	1.	1.
V	82.5	42.	30.	28.	26.	27.	31.	45.	53.	44.	16.
E	80.0	114.	75.	57.	53.	57.	64.	102.	124.	119.	111.
R	77.5	332.	218.	98.	88.	99.	115.	179.	217.	243.	248.
T	75.0	905.	607.	151.	128.	147.	169.	270.	356.	376.	387.
I	72.5	2017.	1295.	224.	174.	206.	229.	355.	473.	556.	609.
C	70.0	3136.	2066.	336.	229.	274.	296.	430.	557.	684.	753.
A	67.5	3812.	2632.	501.	296.	360.	369.	500.	604.	770.	876.
L	67.0<<	3912.	2734.	541.	311.	380.	384.	513.	612.	782.	896.
	65.0	4112.	3012.	726.	371.	463.	443.	569.	647.	818.	948.
A	62.5	4233.	3373.	1001.	446.	562.	521.	655.	719.	853.	988.
N	60.0	3396.	2809.	1144.	498.	638.	604.	764.	828.	935.	1037.
G	57.5	2800.	2260.	1011.	532.	700.	680.	867.	954.	1052.	1129.
L	55.0	2509.	1975.	921.	558.	746.	723.	925.	1049.	1158.	1219.
E	52.5	2338.	1790.	856.	571.	763.	722.	905.	1064.	1163.	1222.
	50.0	2198.	1651.	807.	574.	758.	682.	819.	979.	1061.	1100.
	47.5	2076.	1530.	772.	571.	737.	661.	708.	814.	892.	915.
	45.0	1966.	1431.	754.	566.	709.	664.	632.	677.	705.	716.
	42.5	1889.	1370.	753.	556.	679.	688.	604.	615.	622.	622.
	40.0	1870.	1359.	765.	548.	646.	712.	621.	604.	605.	606.
	37.5	1876.	1369.	781.	544.	620.	727.	672.	624.	616.	617.
	35.0	1874.	1379.	797.	558.	601.	721.	729.	672.	644.	639.
	30.0	1803.	1371.	846.	609.	569.	668.	781.	799.	765.	748.
	25.0	1739.	1382.	922.	682.	589.	605.	694.	785.	846.	868.
	20.0	1703.	1426.	1023.	790.	656.	607.	605.	647.	696.	730.
	15.0	1668.	1473.	1142.	944.	789.	692.	647.	622.	616.	615.
	10.0	1638.	1519.	1287.	1111.	988.	894.	816.	766.	737.	714.
	5.0	1622.	1567.	1453.	1350.	1254.	1184.	1120.	1074.	1051.	1031.
	0.0	1613.	1613.	1613.	1613.	1613.	1613.	1613.	1613.	1613.	1613.

CONE OF MAXIMUM CANDELA



INDEPENDENT TESTING LABORATORIES, INC.
4066 CAMELOT CIRCLE, LONGMONT, CO 80504 USA

PHONE: (303) 442-1255 • FAX: (970) 535-3114 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL85715
ISSUE DATE: 10/02/15
PREPARED FOR: LED ROADWAY LIGHTING LTD.

PAGE: 8 OF 9
REVISED: 06/21/16

5-DEGREE
ZONAL LUMEN SUMMARY

0- 5	39
5- 10	117
10- 15	200
15- 20	295
20- 25	408
25- 30	533
30- 35	654
35- 40	757
40- 45	829
45- 50	863
50- 55	847
55- 60	808
60- 65	808
65- 70	742
70- 75	472
75- 80	152
80- 85	28
85- 90	3
90- 95	0
95-100	0
100-105	0
105-110	0
110-115	0
115-120	0
120-125	0
125-130	0
130-135	0
135-140	0
140-145	0
145-150	0
150-155	0
155-160	0
160-165	0
165-170	0
170-175	0
175-180	0

10-DEGREE
ZONAL LUMEN SUMMARY

0- 10	155
0- 20	650
0- 30	1590
0- 40	3002
0- 50	4694
0- 60	6350
0- 70	7900
0- 80	8524
0- 90	8555
0-100	8555
0-110	8555
0-120	8555
0-130	8555
0-140	8555
0-150	8555
0-160	8555
0-170	8555
0-180	8555



itl boulder
THE LIGHT CENTER OF THE INDUSTRY SINCE 1955



INDEPENDENT TESTING LABORATORIES, INC.
4066 CAMELOT CIRCLE, LONGMONT, CO 80504 USA
PHONE: (303) 442-1255 • FAX: (970) 535-3114 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL85715
ISSUE DATE: 10/02/15
PREPARED FOR: LED ROADWAY LIGHTING LTD.

PAGE: 9 OF 9
REVISED: 06/21/16

ADDRESS: 115 CHAIN LAKE DRIVE
SUITE 201
HALIFAX, NOVA SCOTIA, CANADA B3S 1B3

THIS ITL REPORT WITH THE USE OF THE NVLAP LOGO SHALL NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NVLAP, NIST, OR ANY AGENCY OF THE FEDERAL GOVERNMENT.